


# BENCH MOUNTED FITTING ON A COLUMN WITH PLASTIC INNER TUBE

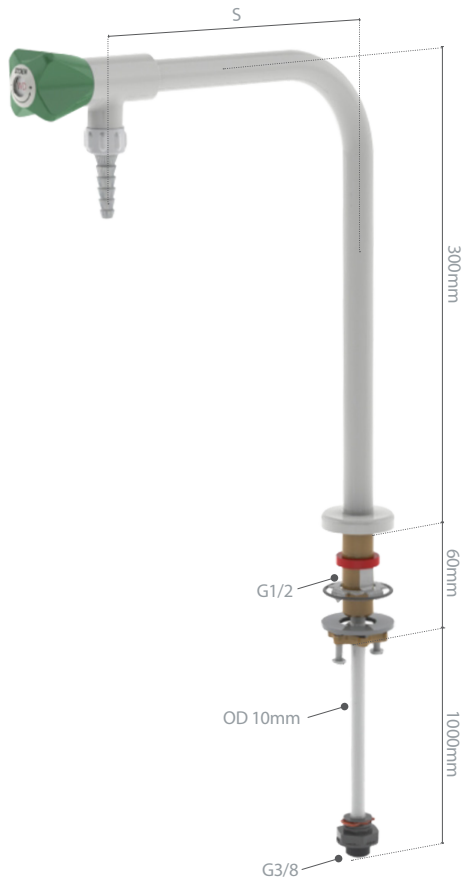

Can be delivered with and without G3/8 push-in fitting

## SPECIFICATIONS

- Handle:** Plastic
- Media indication:** according to EN13792
- Hose nozzle:** Removable plastic
- Headwork:** Diaphragm type
- Opening/closing function:** 1 1/2 x 360°
- Max. working pressure:**  
10 bar / 147 psi at 20°C  
6 bar / 87 psi at 65°C
- Test pressure:** 1 x working pressure
- Weight:** 0.7 kg

## MATERIALS WITH MEDIA CONTACT



- Diaphragm:** PTFE
- Rubber:** EPDM
- Plastics:** LLDPE, POM, PP, PVDF

## ORDERING INFORMATION



For standard configuration please refer to the item numbers below.

- Other options:
- different sizes of push-in fittings
  - different inlet lengths

**Model:** With G3/8 push-in fitting

Media	S = 150mm	S = 200mm
 Distilled water	2533 170 1003-09	2533 159 1003-09
 Deionized water, cold	2533 170 1036-09	2533 159 1036-09

**Model:** Without push-in fitting

Media	S = 150mm	S = 200mm
 Distilled water	2533 009 1003-09	2533 011 1003-09
 Deionized water, cold	2533 009 1036-09	2533 011 1036-09